

Certifications

Approved by ERDF

Section

MV Multifunction

ApplicationField
Laboratory**PRODUCT BENEFITS**

Tuning of the pitch of the tool
Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter	16 - 40 mm 0,630 - 1,575 inch
Peelable semiconductor thickness capacity	0.4 - 1.5 mm
Insulation thickness capacity	7 mm
Stylus included	SR

TOOL DIMENSIONS

Length	305 mm
Width	100 mm
Height	165 mm
Weight without box	1,46 Kg
Packaging	None

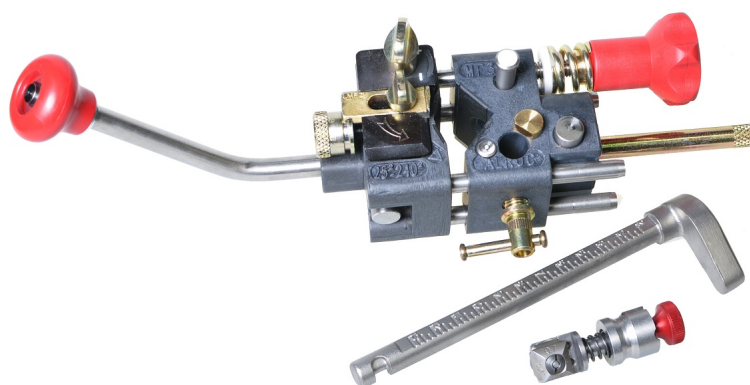
ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE
Phone: +33 2 43 71 11 80
Fax number : +33 2 43 71 16 51
www.alroc.fr

Multifunction tool for outer sheath, peelable semiconductor and insulation

TO DO WHAT

The MF3/40 tools enables the user to :
Remove the outer sheath (PE-PVC-PR) with a straight and neat cut
Score the peelable semiconductor (with the SR scoring stylus delivered with the tool)
Set the length to be removed and remove the insulation with a straight and neat cut

**Options**

SRC - Scoring stylus for peelable semiconductor with chamfer
SCH - Chamfering stylus for insulation

Spare part

KIT-MF3/40 - Protective wear pads
SR - Scoring stylus for peelable semiconductor
LS - Spare blade for peelable semiconductor
LMF2 - Spare blade for outer sheath and primary insulation
BR - Thrust to set the length of insulation to be remove
VBB1 - Screw for locking the thrust
PCR - Quick set up right angled 45° handle
196855 - Straight handle M10
108098 - Clamping knob for blade

Associated tool

ALROC-FENTE - Tool to perform slits on cable's outer sheath
ROTO-TMG - Connector holder for bolted and clamping connections
DSP - Peelable semiconductor lifter



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semiconductor thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none