

**Certifications**

Approved by ERDF

**Section**

MV Multifunction

**Application**

Field

Laboratory

**PRODUCT BENEFITS**

Tuning of the pitch of the tool  
 Embedded wear pads to protect the tool from the contact with the outer sheath

**TOOL CAPACITY**

**Diameter** 16 - 40 mm  
 0,630 - 1,575 inch

**Outer sheath and insulation thickness capacity** 7 mm / 0,275 mm

**TOOL DIMENSIONS**

**Length** 150 mm

**Width** 80 mm

**Height** 100 mm

**Weight without box** 1,24 Kg

**Packaging** None

**ALROC SAS**

Z.I. de la Fonderie - 72160 TUFFE  
 FRANCE

Phone: +33 2 43 71 11 80

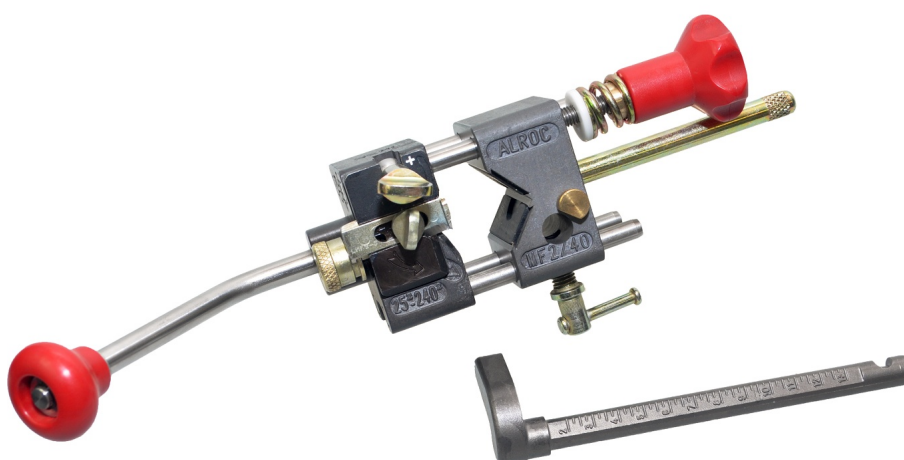
Fax number : +33 2 43 71 16 51

www.alroc.fr

## Multifunction tool for outer sheath and insulation

**TO DO WHAT**

The MF2/40 enables the user to :  
 Remove the outer sheath (PE-PVC-PR) with a straight and neat cut  
 Set the length and remove thicker insulation with a straight and neat cut

**Spare part**

KIT-MF3/40 - Protective wear pads  
 LMF2 - Spare blade for primary insulation  
 BR - Thrust to set the length of insulation to be remove  
 VBB1 - Screw for locking the thrust  
 PCR - Quick set up right angled 45° handle  
 196855 - Straight handle M10  
 108098 - Clamping knob for blade

**Associated tool**

MF1+/25 - Multifunction tool for bonded semiconductor  
 SRC - Scoring stylus for peelable semiconductor with chamfer

# MF2/40



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Outer sheath and insulation thickness capacity		Length	Width	Height	
<b>MF2/40</b>	16 - 40 mm 0,630 - 1,575 in	7 mm / 0,275 mm		150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none
<b>MF2/40-S</b>	16 - 40 mm 0,630 - 1,575 in	11 mm / 0,433 in		150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none
<b>MF2/60</b>	16 - 58 mm 0,630 - 2,283 in	7 mm / 0,275 mm		170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none
<b>MF2/60-S</b>	16 - 58 mm 0,630 - 2,283 in	11 mm / 0,433 in		170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none