

Certifications

Approved by ERDF

Section

MV Multifunction

Application

Field
Laboratory



PRODUCT BENEFITS

Tuning of the pitch of the tool
Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter 16 - 40 mm
0,630 - 1,575 inch

Peelable semicon thickness capacity Option

Insulation thickness capacity 7 mm

Stylus included None

TOOL DIMENSIONS

Length 305 mm

Width 100 mm

Height 165 mm

Weight without box 1,38 Kg

Packaging None


ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE
Phone: +33 2 43 71 11 80
Fax number : +33 2 43 71 16 51
www.alroc.fr

Multifunction tool for outer sheath and insulation

TO DO WHAT

The MF3/40-SSR tools enables the user to :
Remove the outer sheath (PE-PVC-PR) with a straight and neat cut
Set the length to be removed and remove the insulation with a straight and neat cut

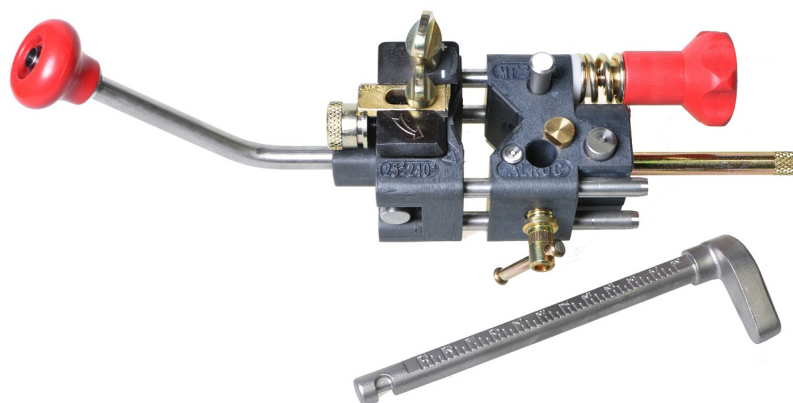

Options

- SR - Scoring stylus for peelable semiconductor
- SRC - Scoring stylus for peelable semiconductor with chamfer
- SCH - Chamfering stylus for insulation

Spare part

- KIT-MF3/40 - Protective wear pads
- LMF2 - Spare blade for outer sheath and primary insulation
- BR - Thrust to set the length of insulation to be remove
- VBB1 - Screw for locking the thrust
- PCR - Quick set up right angled 45° handle
- 196855 - Straight handle M10
- 108098 - Clamping knob for blade

Associated tool

- ALROC-FENTE - Tool to perform slits on cable's outer sheath
- ROTO-TMG - Connector holder for bolted and clamping connections
- DSP - Peelable semiconductor lifter



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semicon thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none