

Certifications

Approved by ERDF

Section

MV Multifunction

ApplicationField
Laboratory**PRODUCT BENEFITS**

Tuning of the pitch of the tool
 Embedded wear pad to protect the tool from the contact with the outer sheath
 For thick insulation

TOOL CAPACITY

Diameter	16 - 58 mm 0,630 - 2,283 inch
Pelable semicon thickness capacity	0.4 - 1.5 mm
Insulation thickness capacity	11 mm
Stylus included	SRC

TOOL DIMENSIONS

Length	305 mm
Width	115 mm
Height	165 mm
Weight without box	1,75 Kg
Packaging	None

ALROC SASZ.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

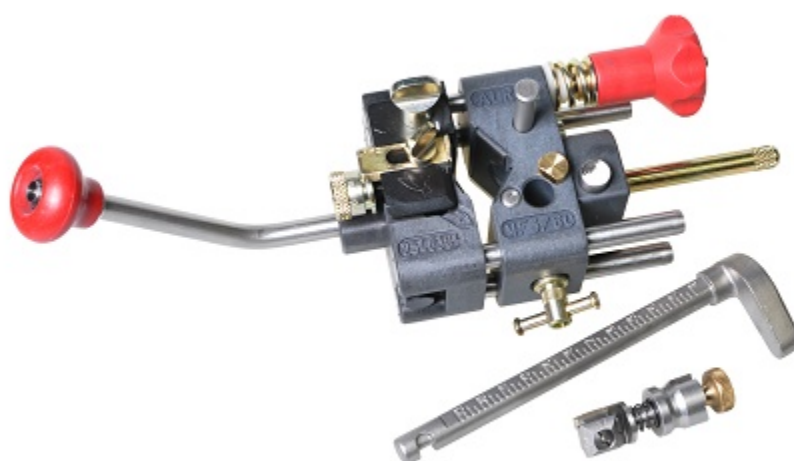
www.alroc.fr

Multifunction tool for outer sheath, peelable semiconductor and thick insulation

TO DO WHAT

The MF3/60-SRC tools enables the user to :

- Remove the outer sheath (PE-PVC-PR) with a straight and neat cut
- Score the peelable semiconductor with a chamfer on the edge of the semiconductor cutback (with the SRC scoring stylus delivered with the tool)
- Set the length to be removed and remove thicker insulation with a straight and neat cut

**Options**

SCH - Chamfering stylus for insulation
 SR - Scoring stylus for peelable semiconductor

Spare part

KIT-MF3/40 - Protective wear pads
 LMF2-S - Spare blade for outer sheath and thick insulation
 BR - Thrust to set the length of insulation to be remove
 VBB1 - Screw for locking the thrust
 PCR - Quick set up right angled 45° handle
 196855 - Straight handle M10
 108098 - Clamping knob for blade
 SRC - Scoring stylus for peelable semiconductor with chamfer
 LS-C - Spare blade for peelable semiconductor with chamfer

Associated tool

ALROC-FENTE - Tool to perform slits on cable's outer sheath
 ROTO-TMG - Connector holder for bolted and clamping connections
 DSP - Peelable semiconductor lifter
 C-SR - Wrench to replace the semiconductor blade



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semicon thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none